


WAZAN.PK
WEIGHING DELIVERED WITH PRECISION

5~40t



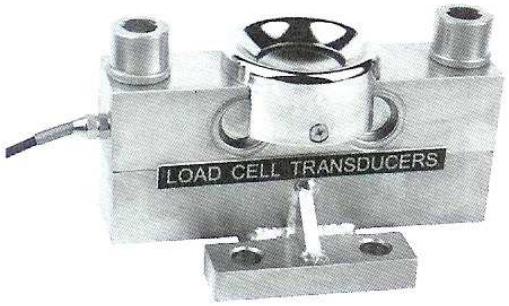


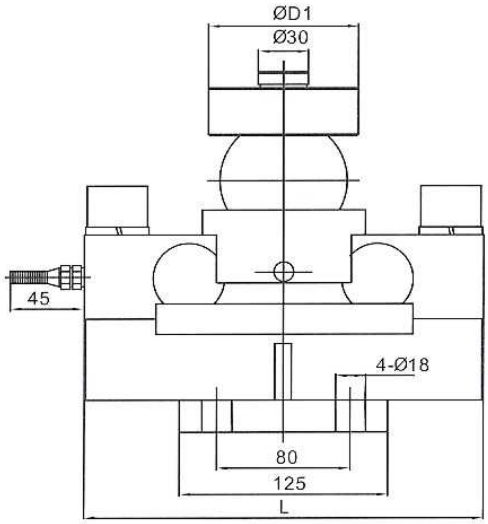


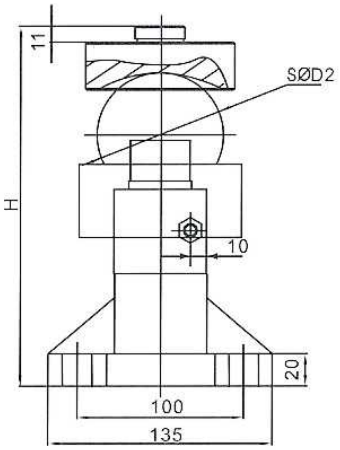


Rated Load (t)	5	10,15,20,25,30	40
D1	68	88	88
D2	50.8	76.2	76.2
H	168.8	224.7	230.7
L	224	240	240

50t

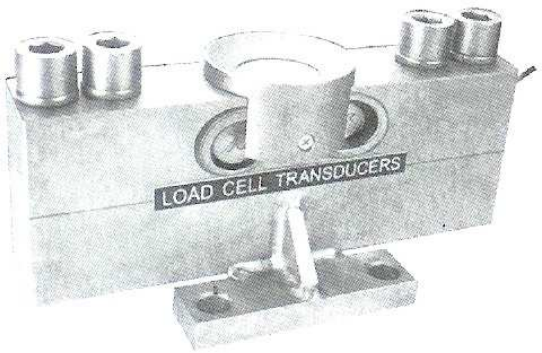

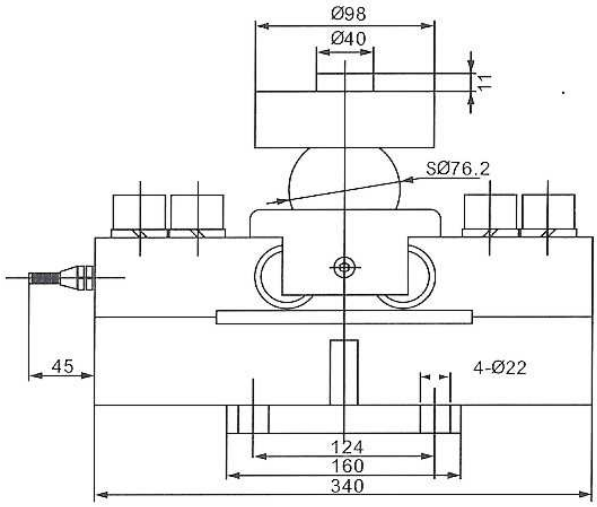

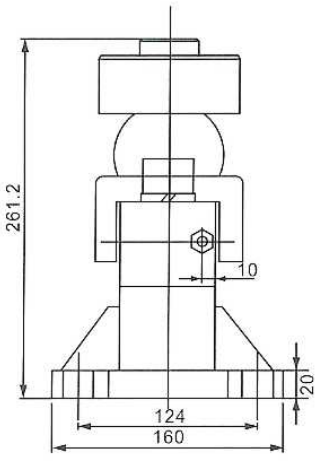

TECHNICAL PARAMETER | Exc+(Red);Exc-(Black);Sig+(Green);Sig-(White)

Rated Load	5,10,15,20,25,30,40,50t	Operating Temp Range	-30~+70°C
Sensitivity	2.0±0.002mV/V	Safe load limit	150,120(40~50t)%F.S
Total error	C2	Over load limit	300,200(40~50t)%F.S
Creep(30min)	±0.02%F.S	Recommendexcitation	10~12V DC
Zero balance	±1%F.S	Maximumu excitation	15V DC
TCO	±0.02%F.S/10°C	Protection Class	IP67(5t),IP68(10~50t)
TC SPAN	±0.02%F.S/10°C	Construction	Alloy Steel
Input resistance	750±10Ω	Cable	Length=L:5.2m(5t),8m(10t),10m(15t),10/12m(20t);
Output resistance	702±3Ω,702±5Ω(L≥15m)		12/15m(25t),12/16m(30t),16m(40~50t)
Insulation resistance	≥5000MΩ		Diameter: ϕ6mm